
No.	revision	BY	DATE	AUTH
0	ISSUED		02/2015	

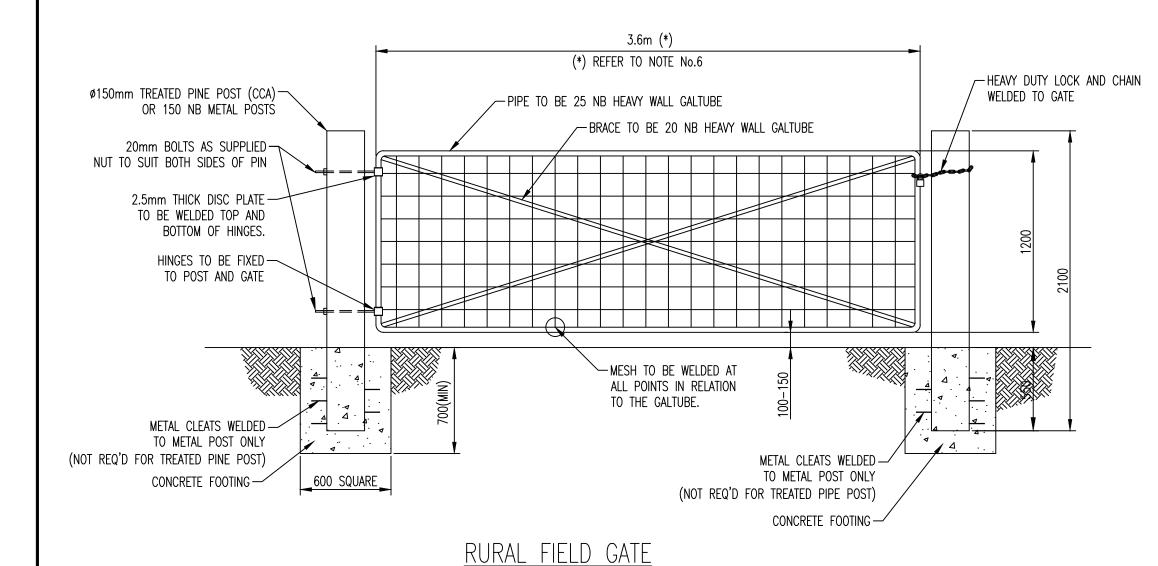

NOTES:

- 1. ALL STEEL TO BE GALVANIZED.
- 2. ALL STEEL POSTS TO BE SECURELY CAPPED.
- 3. ALL WELDS TO BE POWER WIRE BRUSHED AND COLD GALVANIZED.
- 4. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE SHOWN.
- 5. MESH TO BE METRIC MESH 46G5 AND GALVANIZED FINISHED COMPLETE WITH FITTINGS.
- 6. A 3.9m GATE SHALL ONLY BE INSTALLED WHEN THE INTERNAL VEHICLE TRACK DOES NOT RUN PERPENDICULAR TO THE GATE LOCATION, ALL GATES WITH WIDTHS LARGER THAN 3.9M SHALL ONLY BE CONSIDERED IN EXCEPTIONAL CIRCUMSTANCES AND TECHNICAL SPECIFICATIONS WILL REQUIRE APPROVAL PRIOR TO INSTALLATION.
- 7. CONCRETE FOOTINGS TO BE GRADE N32 TO AS 1379
- 8. ALL GALVANISED STEEL TO MEET AS/NZS 4792 FOR HOT-DIP GALVANISED (ZINC) COATING ON FABRICATED FERROUS ARTICLES

* INDICATES SIGNATURES ON ORIGINAL ISSUE OF DRAWING.

SCALE: 250 0 250 500 750 1000 1:25 SCALE IN MILLIMETRES COORDINATOR DESIGN SURVEYED: N/A 2015 N/A 2015 N/A A/MANAGER ASSETS MANAGEMENT	11/2/2015	FENCING GATE DETAILS RURAL FIELD GATE		Y OF WANNEROO IFRASTRUCTURE	
DESIGNED: C.O.W 2015 CIVIL PROJECTS DESIGNER DRAWN: C.O.W 2015 CIVIL PROJECTS DESIGNER DRAWN: APPROVED: * H.SINGH A/DIRECTOR INFRASTRUCTURE			FILE No. N/A PROJECT No. N/A	TS 01-13-0	ORIGINAL DRG. SIZE