


- NOTES:
- PLANS ARE INDICATIVE OF DESIGN INTENT ONLY. STRUCTURAL CERTIFICATION AND CONSTRUCTION DRAWINGS BY CONTRACTOR.
  - ALL POLES TO BE GALVANISED TO MATCH EXISTING FENCES, SIZE AS SPECIFIED BY CONTRACTOR. CHAINMESH FENCING TO BE INSTALLED TO HEIGHTS ON DRAWINGS AND IN SPECIFICATION.
  - ALL EXISTING VEGETATION TO BE PROTECTED DURING WORKS.
  - 3M RUN OFF ZONE ON ALL SIDES OF SOCCER MARKINGS TO BE MAINTAINED.
  - INDICATIVE LINE OF MAINLINE IRRIGATION MARKED, TO BE CONFIRMED ON SITE BY SURVEY.
  - IT IS THE CONTRACTORS RESPONSIBILITY TO CAREFULLY REVIEW THE DRAWINGS AND SPECIFICATION, AND CHECK ALL QUANTITIES AND ENSURE THAT ALL ITEMS ARE INCLUDED IN THE SUBMISSION. ANY DISCREPANCIES TO BE REPORTED TO THE SUPERINTENDENT. PLEASE REFER :  
3836-1 - MASTERPLAN  
3836-3 - DIAMOND 2 WORKS  
3836-4 - DIAMOND 3 WORKS  
3836-5 - DIAMOND 4 WORKS  
3836-6 - DETAILS  
3836-7 - BATTING CAGE AMENDMENTS

- Key
- Estimated existing lighting towers
  - Existing Backnet fencing
  - 3m high fencing, refer to specification for detail
  - Temporary fencing, refer to specification for detail
  - 100mm Depth Grey Concrete to specification
  - Foundation locations for future shelters refer exterior drawings
  - Reconstituted limestone edging 250 x 350 x 500mm blocks to specification
  - Aluminium seating - to be surface fixed
  - Shade sail - to be provided by others
  - Existing underground reticulation lines
  - Existing underground power
  - Existing underground unknown
  - Existing sprinkler locations

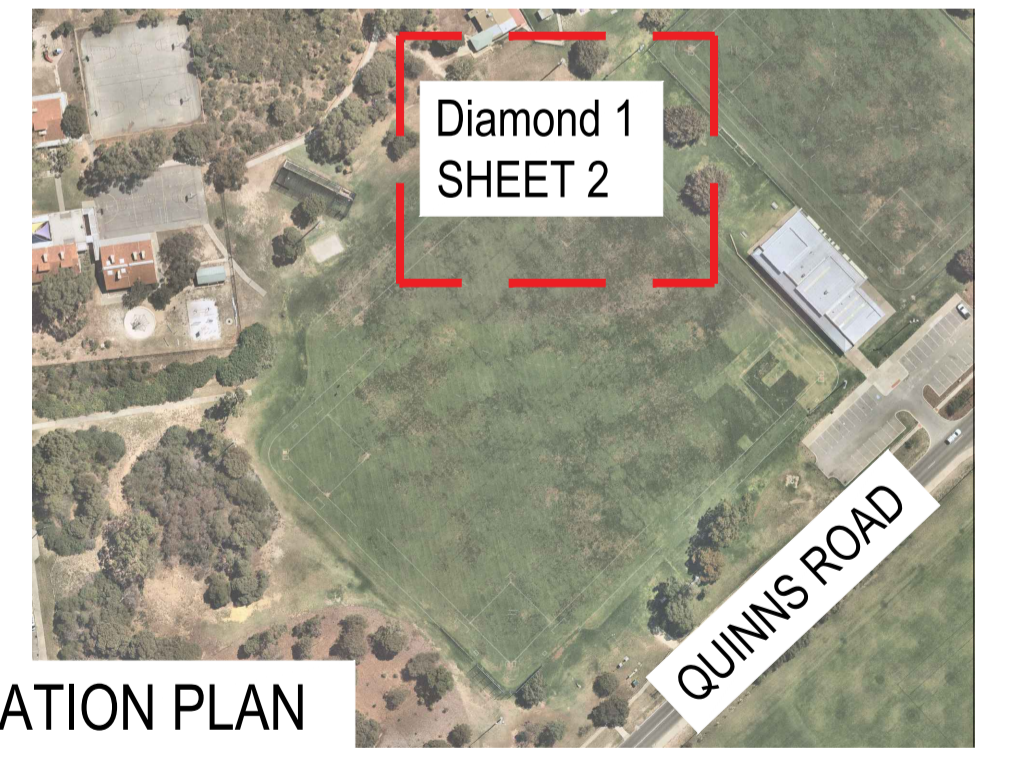

**CITY OF WANNEROO ASSETS**

**GUMBLOSSOM RESERVE**  
BASEBALL FACILITY UPGRADES

QUINNS ROCKS

**DIAMOND 1 WORKS**  
SHEET 2 OF 7

DRAWING No. SHEET REVISION ORIGINAL DRG. SIZE

**3836-2-0 A1**

No.	REVISION	BY	DATE	AUTH	No.	REVISION	BY	DATE	AUTH	SCALE	SURVEYED	DRAWN	AUTHORISED	APPROVED	FINANCE CODE	PWD No.
0	ISSUED	KD	3/2021	NR						1:100	S.BUCKLE SURVEYOR	K.ONDEK LANDSCAPE DESIGNER	* S.SPINKS MANAGER COMMUNITY FACILITIES	* R.KORENHOF MANAGER INFRASTRUCTURE CAPITAL WORKS	PR-4248	PMO20030
										LOCAL	K.ONDEK LANDSCAPE DESIGNER	* N.RAINFORD ACTING COORDINATOR DESIGN	* H.SINGH ACTING DIRECTOR ASSETS		00/00000	39975

Removeable fence panels (2.01m panels with .09 gap between ) total length 28.8m.  
**PLEASE NOTE** power for lighting may cross fence alignment, sleeves must not cross underground power, shorter panel sections may be required. Ground clearance to bottom of fence to be no greater than 25mm.

**DIAMOND 1**  
**PLEASE NOTE** the temporary fence panels for Diamond 1 are included as separable portions and inclusion is subject to available funds.

Baseball markings as per Nearmaps aerial, shows overlap with planned works

Soccer markings as per Nearmaps aerial, shows overlap with planned works, Soccer club to be engaged on DRAFT plans

1.2m wide .9m high swing gate for access to dugout.

3m High fencing to match existing fences

1.2m wide, 2.4m high pedestrian access swing gate, .6m infill panel above gate to maintain 3m height

2 no. aluminium marine grade sports seating with back. To be 6m in length and surface mounted to reinforced 100mm depth concrete hardstand as shown. Refer 3836-6 detail 2.

Reconstituted limestone edging 250 x 350 x 500 mm to levels and dimensions to confirmed on site with superintendant, refer 3836-7 detail 6

Future shelter subject to available funding. Foundations to be installed as shown and center of foundation to be marked in concrete by a smooth surface for future installation. Refer exterior drawing 03 DF06 for detail.

1 no. aluminium marine grade scorers table and seat with back. To be 3.5m in length and surface mounted to reinforced 100mm depth concrete hardstand as shown. Refer 3836-6 detail 1.

New footpath by others

Future shelter subject to available funding. Foundations to be installed as shown and center of foundation to be marked in concrete by a smooth surface for future installation. Refer exterior drawing 03 DF06 for detail.

2 no. aluminium marine grade sports seating with back. To be 6m in length and surface mounted to reinforced 100mm depth concrete hardstand as shown. Refer 3836-6 detail 2.

Future shelter subject to available funding. Foundations to be installed as shown and center of foundation to be marked in concrete by a smooth surface for future installation. Refer exterior drawing 03 DF06 for detail.